

LARGE DIGITAL CLOCKS

CC2003

FOUR INCH HIGH DIGITS Visible up to 100 Feet Away

For Home, Office, or Business



Stand-Alone, Plug and Play - Easy to install

Attractive, black anodized aluminum enclosure

Easily hangs on the wall - or set it on a shelf

Four Inch High - Super Bright Red LED Digits - Visible up to 100 feet away.

12 or 24 Hour Time Display

AM / PM Indicator

Keeps time during power outages - No Batteries Required.

Includes 12 VAC Power Module

TWO YEAR WARRANTY

For Synchronized System Clocks see the CC2000 and AE Series Products



**APPLIED
TECHNICAL
SYSTEMS**

800-444-7161

BOX 5705 • SHREVEPORT, LOUISIANA • 71135

FAX: 318-797-4864

www.ats-usa.com

phone: 318-797-7508

INSTALLATION:



The CC2003 can be wall mounted in the same manner as you would hang a picture or another type of clock. For best results, secure a #8 or larger pan head screw to the wall. The screw should extend about 1/2" to 3/4" from the wall. Hang the CC2003 on the secured screw.

For shelf mount set the CC2003 on a secure flat surface.



The CC2003 can be programmed to your requirements:

- DIP switch 1 Set to HH:MM for displaying hours and minutes. Set for MM:SS to display minutes and seconds.
 - DIP switch 2 Set for 12 or 24 hour format.
 - DIP switch 3 Set for 50 or 60 HZ operation.
- Factory settings are HH:MM, 12HR, and 60HZ



Connect power:

A power module is provided. Insert the power plug into the power jack, as shown. Plug the power module into your standard AC receptacle.

Time will be displayed (12:00 or 0:00) according to the settings above.




Set the time:

Press the HOURS push-button until the desired hours are shown. An AM/PM indicator is provided in the upper left hand corner.
Press the MINUTES push-button until the desired minutes are shown.
To synchronize with another clock, set the matching minute at the instant the reference clock updates its minute.

SPECIFICATIONS:

Power:	12VAC, 6VA Max, 50/60 Hz (DIP switch selected). A power module is provided
Format:	12 or 24 Hour Format (DIP switch selected). AM/ PM Indicator (upper left-hand corner of display)
Set time:	Set Switches - Increment Hours and Minutes, accessed at the back panel
Backup:	Capacitive Backup (no batteries reequired). Keeps time for up to one hour during power outages
Accuracy:	Synchronous with the 50 or 60 HZ AC line. 0.003% crystal during backup.
Enclosure:	Black Anodized Aluminum enclosure with red acrylic lens. Measures 12"W x 6.1"H x 3.5"D.

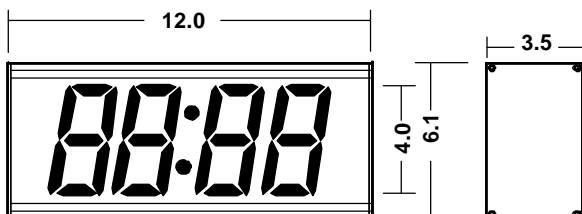

Extend your Power Module by up to 6 feet

9110-2202 Power Extension Cable

*Available upon request

