



TYPICAL WIRING FOR DRY CONTACTS FROM P.B. OR LIMIT SWITCH

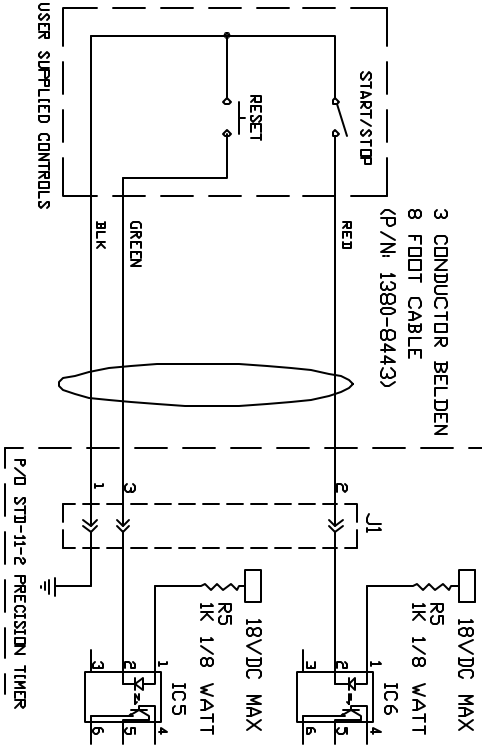


CONTROL SPECIFICATIONS:

DRY CONTACT OR OPEN COLLECTOR NPN TRANSISTOR ONLY
 DO NOT APPLY VOLTAGES AT ANY LEVEL TO THESE INPUTS
 COUNT INPUT MEASURES ELAPSED TIME WHEN CLOSED
 RESET INPUT RESETS ON MOMENTARY CONTACT CLOSURE
 8 FOOT, 3 CONDUCTOR CONTROL CABLE PROVIDED

TYPICAL WIRING FOR NPN OUTPUT FROM PLC OR SENSOR

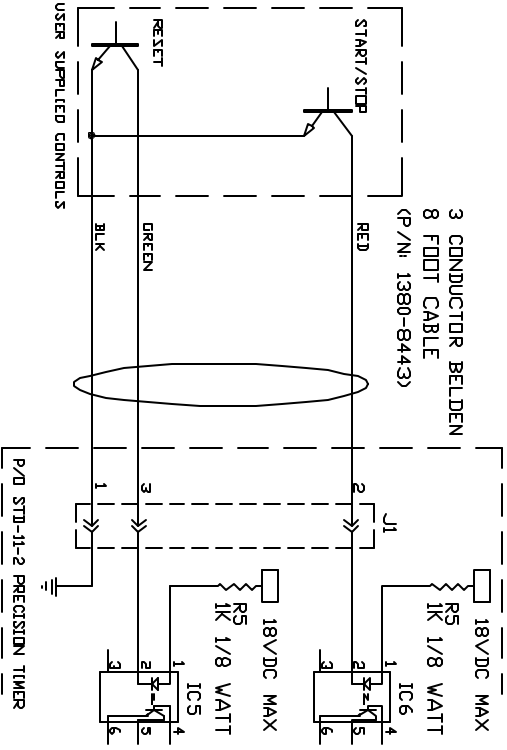

LOCAL POWER FOR ALL WIRING SCHEMES

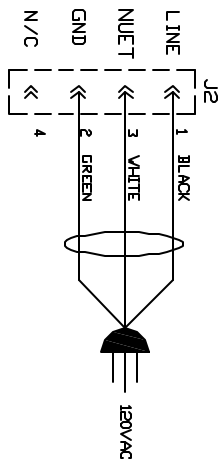

POWER SPECIFICATIONS:

120VAC 60HZ, LESS THAN 2VA
 6 FOOT POWER CORD IS INCLUDED

DRAWN BY			PROJECT STD-11-2 PRECISION TIMER WIRING	SCALE NTS
DTI 8/13/02				
REVISIONS		P.O. BOX 5705 SHREVEPORT, LA 71135	SHEET #	REV. #
DESCRIPTION		PLDNAME STD112WD1	DRAWING #	
WIRING DIAGRAM				