



TYPICAL WIRING FOR DRY CONTACTS FROM P.B. OR LIMIT SWITCH

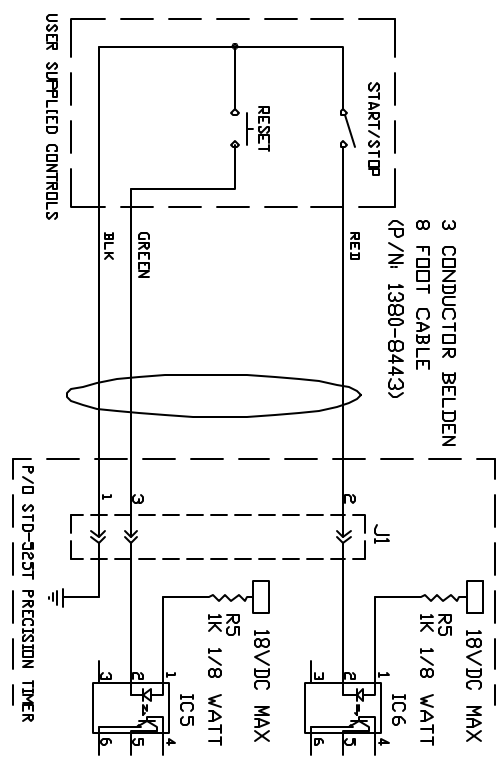

CONTROL SPECIFICATIONS:

DRY CONTACT OR OPEN COLLECTOR NPN TRANSISTOR ONLY
 DO NOT APPLY VOLTAGES AT ANY LEVEL TO THESE INPUTS
 COUNT INPUT MEASURES ELAPSED TIME WHEN CLOSED
 RESET INPUT RESETS ON MOMENTARY CONTACT CLOSURE
 8 FOOT, 3 CONDUCTOR CONTROL CABLE PROVIDED


LOCAL POWER FOR ALL WIRING SCHEMES

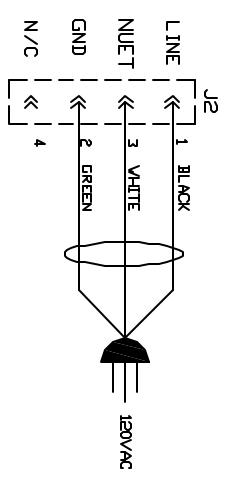

POWER SPECIFICATIONS:

120VAC 60HZ, LESS THAN 2VA
 6 FOOT POWER CORD IS INCLUDED

TYPICAL WIRING FOR NPN OUTPUT FROM PLC OR SENSOR

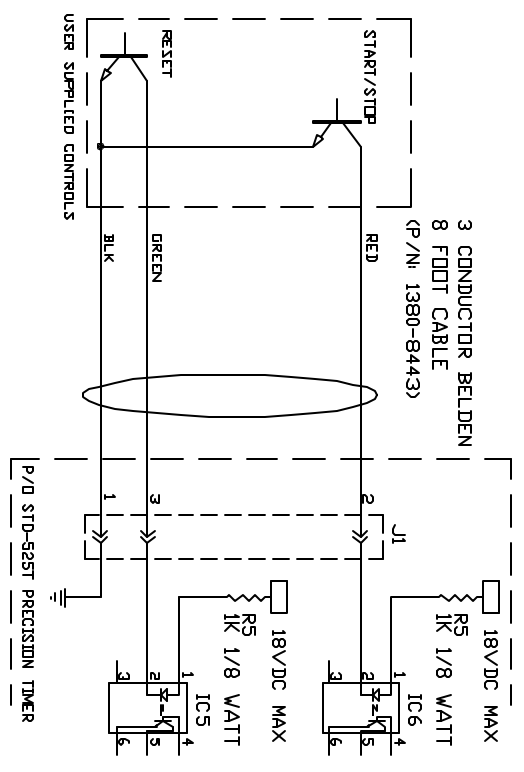

VCAD LTVATS DWGS\STD-11-2\		P.O. BOX 5705 SHREVEPORT, LA 71135	
		SCALE NTS	
PROJECT		STD-525T PRECISION TIMER WIRING	
DRAWN BY		DESIGNER/TIMER	
DTI		3/20/03	
REVISIONS		DRAWING #	
		FILENAME: STD525T.WD1	
		DRAWING #	