



FRONT VIEW

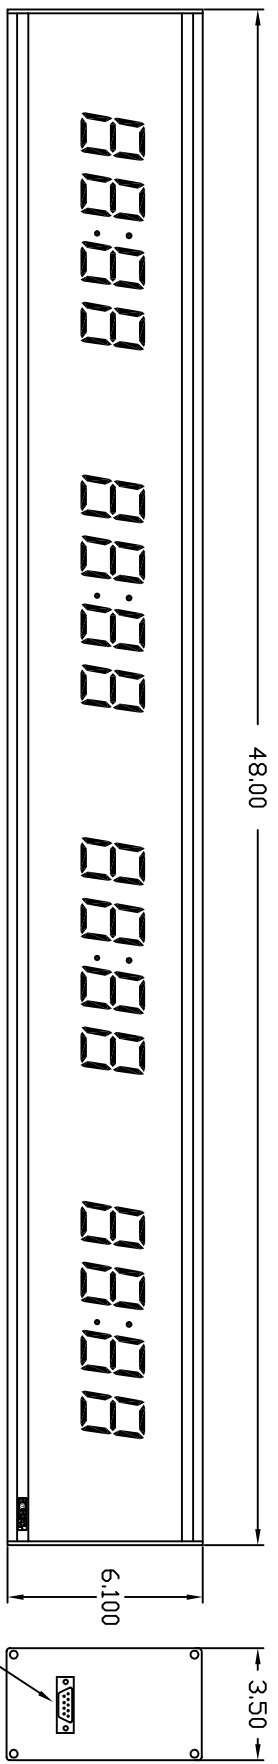

BACK VIEW

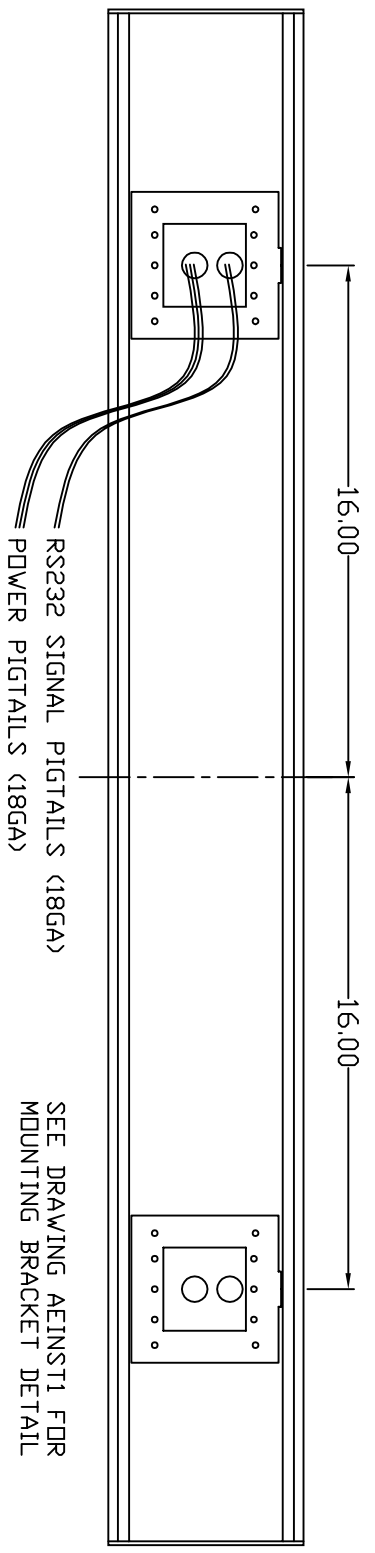

OPTIONAL DB-9 CONNECTOR FOR SERIAL DATA COMMUNICATION

SPECIFICATIONS:

AE24-388-4 TIME ZONE DISPLAY
 RS232 CONTROLLED: INDIVIDUALLY ADDRESSED OR FIXED OFFSET
 ANODIZED ALUMINUM ENCLOSURE
 .118" THICK RED PLEXIGLASS LENS
 .125" THICK BLACK ABS BACK PANEL
 MOUNTING BRACKETS PROVIDED FOR MOUNTING TO SINGLE GANG, DOUBLE GANG AND 4" BOXES
 TIME ZONE LABELS PROVIDED AS REQUESTED BY CUSTOMER/END USER
 POWER/SIGNAL WIRING MAY BE ROUTED THROUGH EITHER MOUNTING BRACKET (RIGHT-HAND SIDE SHOWN ABOVE) OR OPTIONAL DB-9 CONNECTOR FOR SERIAL CONNECTION MAY BE REQUESTED BY CUSTOMER/END USER

SEE DRAWING AEINST1 FOR MOUNTING BRACKET DETAIL

VCAD LTV\ATS DWGS\AE\388 TZ\

 P.O. BOX 5705
 SHREVEPORT, LA
 71135

APPROVALS	DATE	DESCRIPTION	SCALE
DRAWN BY GJB	2/15/01	AE24-388-4 TIME ZONE DISPLAY RS232 CONTROLLED	1:1
CHECKED BY			
APPROVED BY			
REVISIONS			
DTI	7-23-01	ASSEMBLY	