


SHOWN WITH BUILT-IN FRONT PANEL CONTROLS  
(INCLUDED ONLY ON MULTI-FUNCTION  
CLOCK/TIMER VERSIONS)

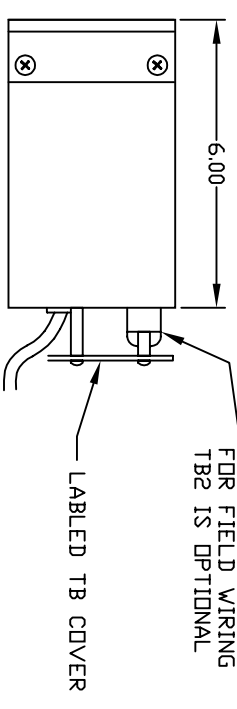

8FT. POWER CORD IS STANDARD

**SPECIFICATIONS**

AE26R-427A GPS MASTER CLOCK  
BLACK ANODIZED ALUMINUM ENCLOSURE (19"W X 3.5"H X6"D)  
FITS STANDARD 19" RACK  
VISIBLE UP TO 100 FEET AWAY  
OPERATES FROM 120 VAC, 100 MA. MAX, 8 FT POWER CORD PROVIDED  
FIELD WIRING- TERMINAL BLOCKS)  
3/8" RED ACRYLIC LENS  
INPUT = GPS INPUT (3 WIRE) FROM GPS ANTENNA/RECEIVER  
(PN: GPS-427A)  
OUTPUT = RS232 SERIAL DATA (2 WIRE)  
ADDRESS 15 = TIME OF DAY (12 OR 24 HOUR FORMAT)  
ADDRESS 13 = DATE (MM DD YY)  
ADDRESS 12 = DAY OF THE WEEK (1 THROUGH 7),  
JULIAN DAY (001 THROUGH 365, 366 ON LEAP YEAR)

APPROVALS	DATE
DRAWN BY DTI	5-31-01
CHECKED BY	
APPROVED BY	

VCAD LTV\ATS DWG\AE\AE2X\ <b>ATS APPLIED TECHNICAL SYSTEMS</b>		P.D. BOX 5705 SHREVEPORT, LA 71135	
PRODUCT	AE26R-427A	SCALE	1:4
RACK MOUNT GPS MASTER CLOCK		JOB #	
DESCRIPTION		SHEET #	
FINISHED GOOD		REVISION	
		FILENAME	AE26R-427A
		DRAWING #	